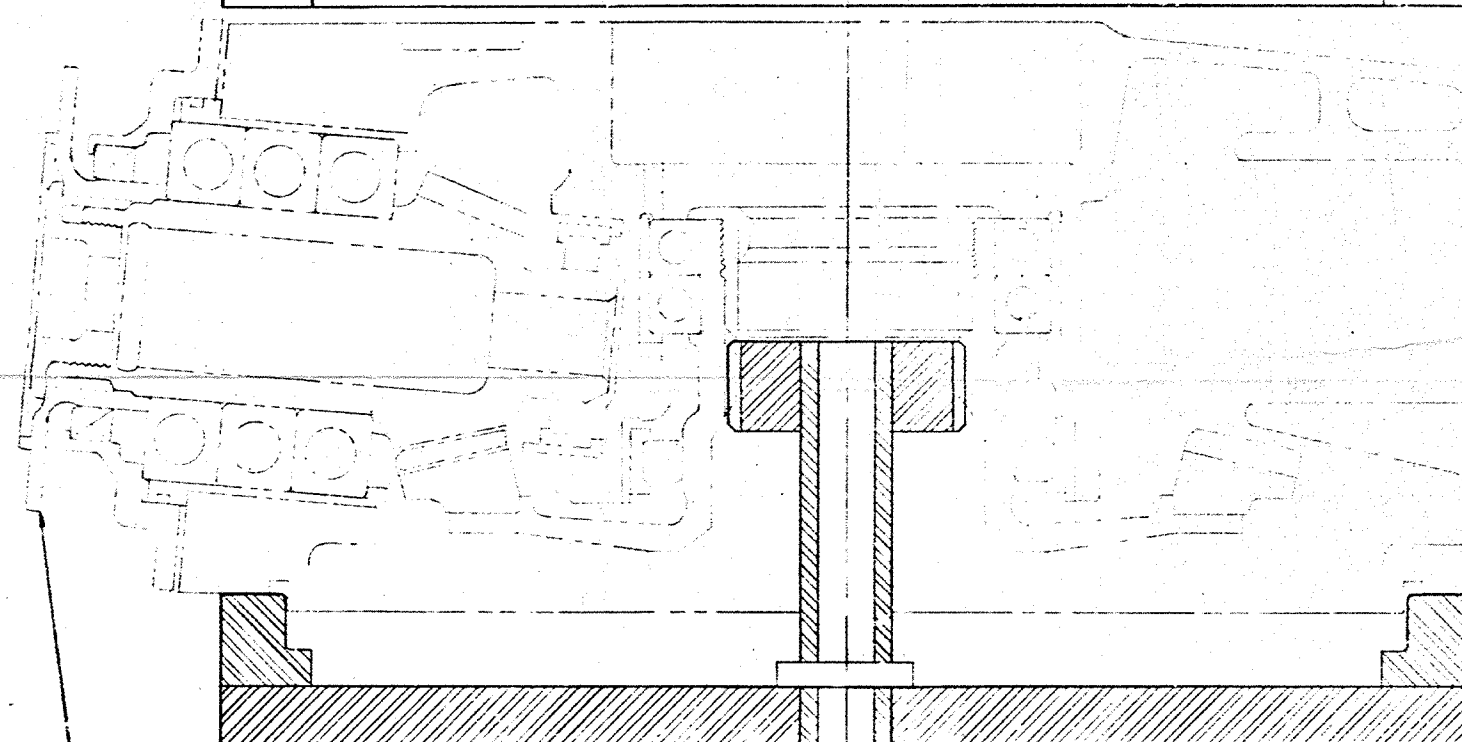
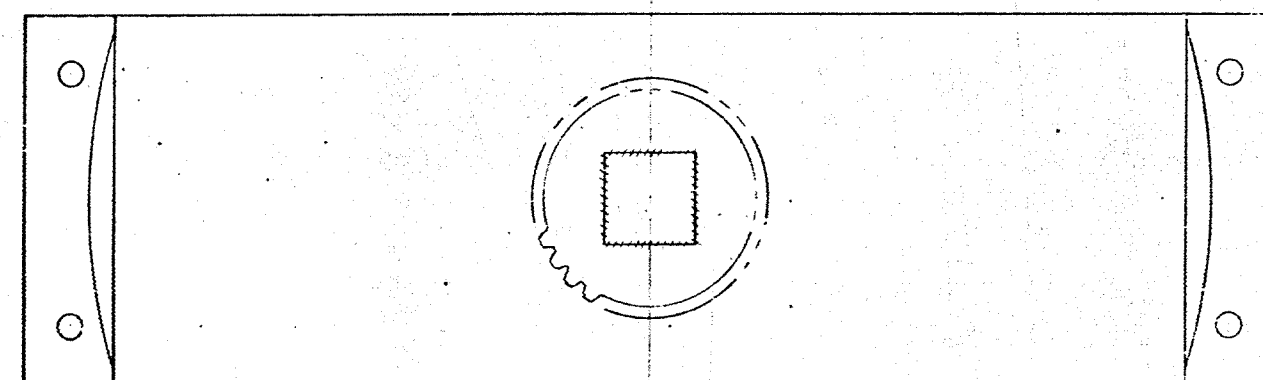
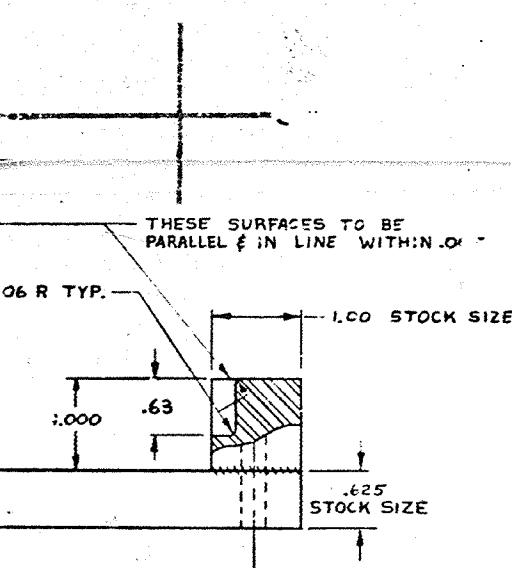


LD

10

B

A\$100.00**F 2**

3. ALTERNATE MATERIAL - 2 1/4" DIA X 1.25" 4130 STL.
2. MARK PER BPS FW 4050.
1. BREAK EDGES .015 R OR .015 X 45° CHAMFER EXCEPT AS NOTED.

NOTES:

4


Purchased under United States Government Contract Number 34401-4-0-0199-71. It may be either released outside the Government or used, duplicated, or disclosed in whole or in part for manufacturing or procurement, without the written permission of Bell Helicopter Company, except that (1) use solely for repair or overhaul work or for the Government, where the item is not a standard item, is not otherwise authorized; (2) a suitable timely performance of the work is not to be a condition of release; (3) the release, use, duplication or disclosure shall be subject to the terms and limitations of this license shall be subject to any reproduction hereof in whole or in part.

D


C

B


A

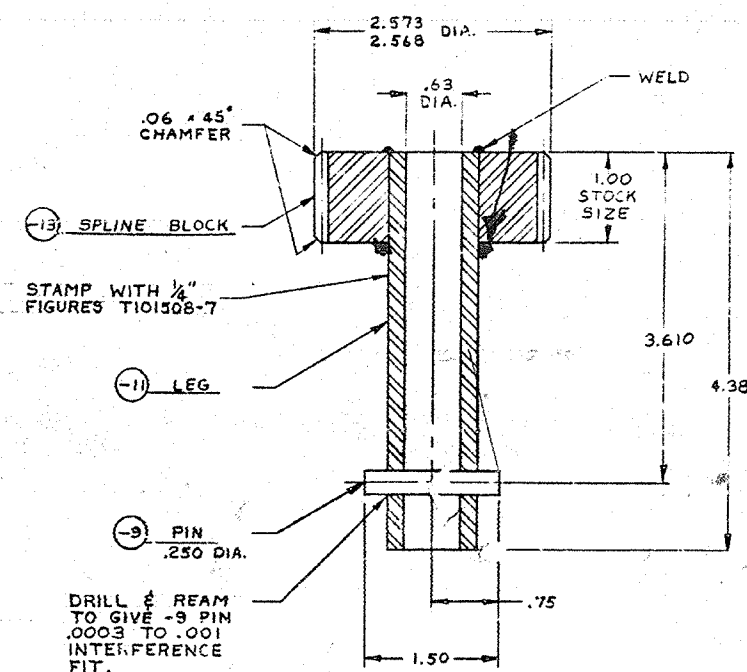

SECTION A-A


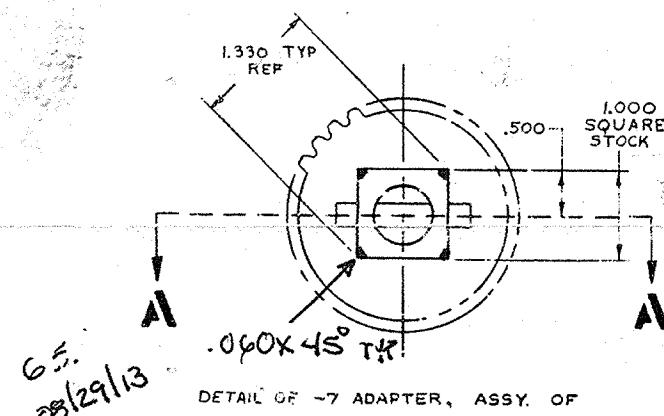


DETAIL OF -7 ADAPTER, ASSY. OF


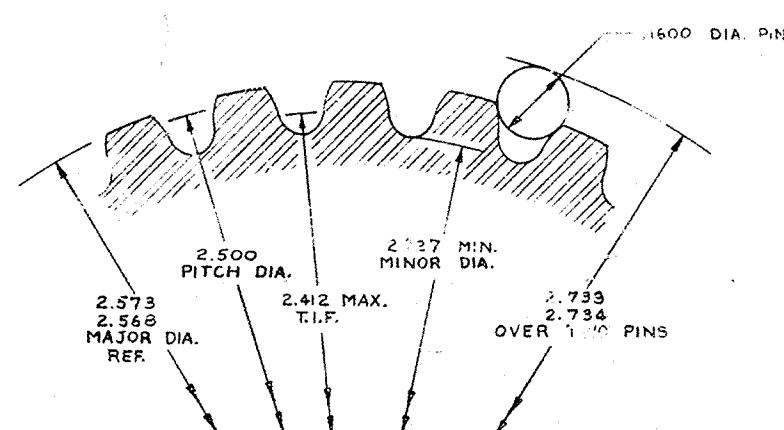


SPLINE DATA SX SIZE

NO. OF TEETH	30
DIAMETRAL PITCH	12/24
PRESSURE ANGLE	30°
BASE DIAMETER	2.1651
CIRCULAR PITCH	2.618
FLAT OR FILLET ROOT	OPTIONAL

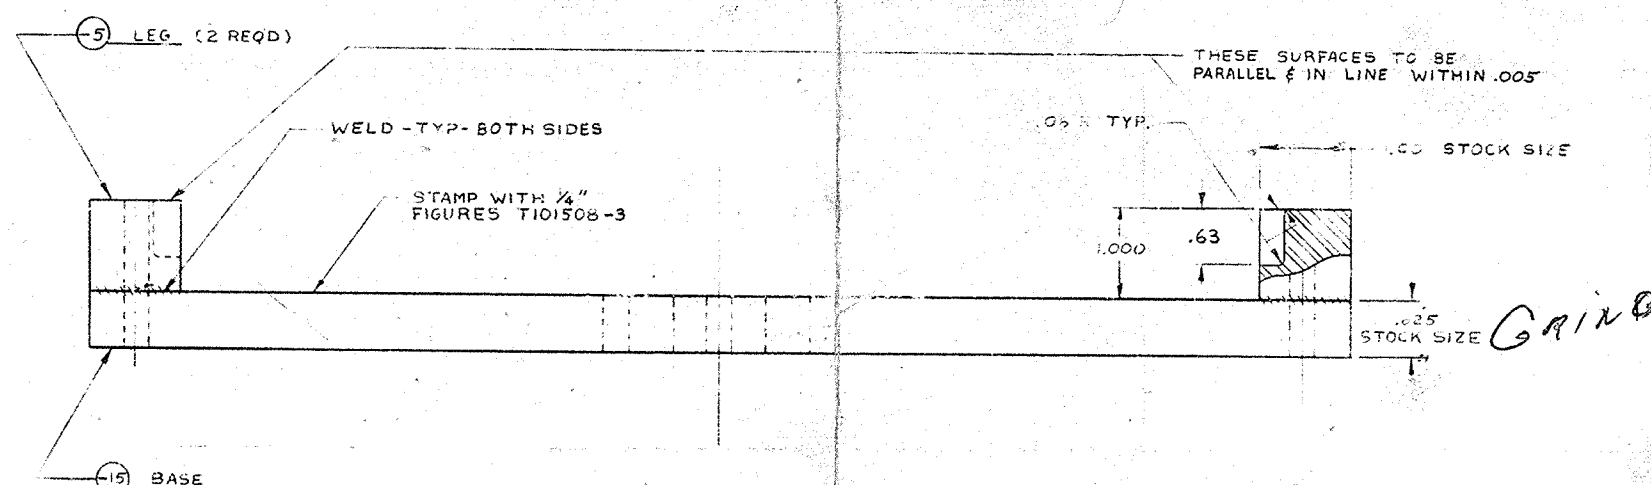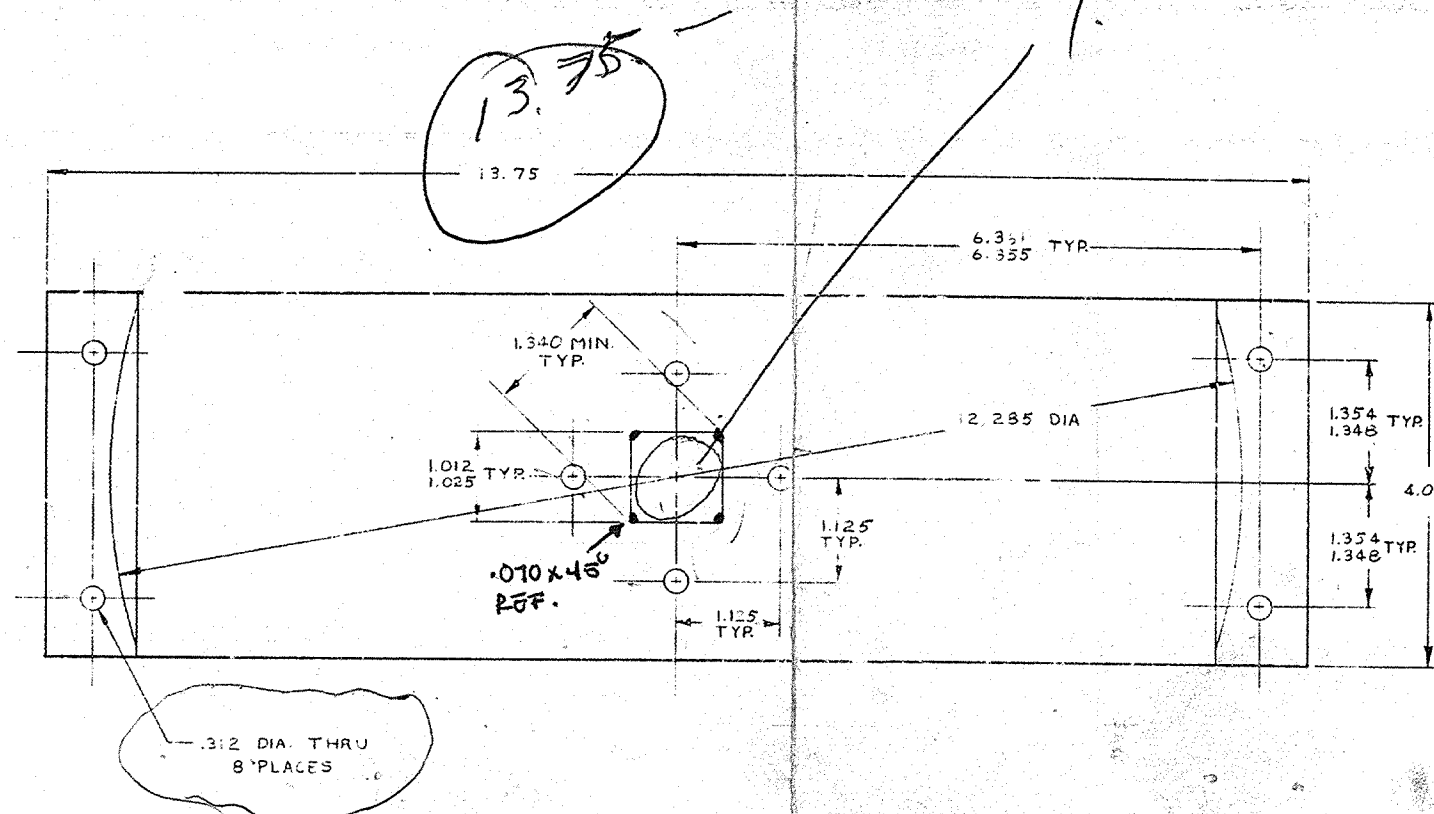

DETAIL OF -3 BAR, ASSY. OF

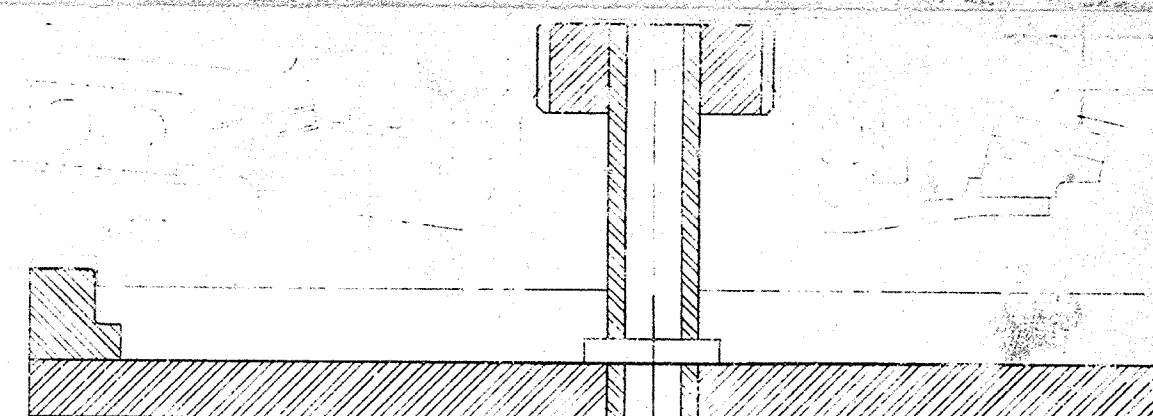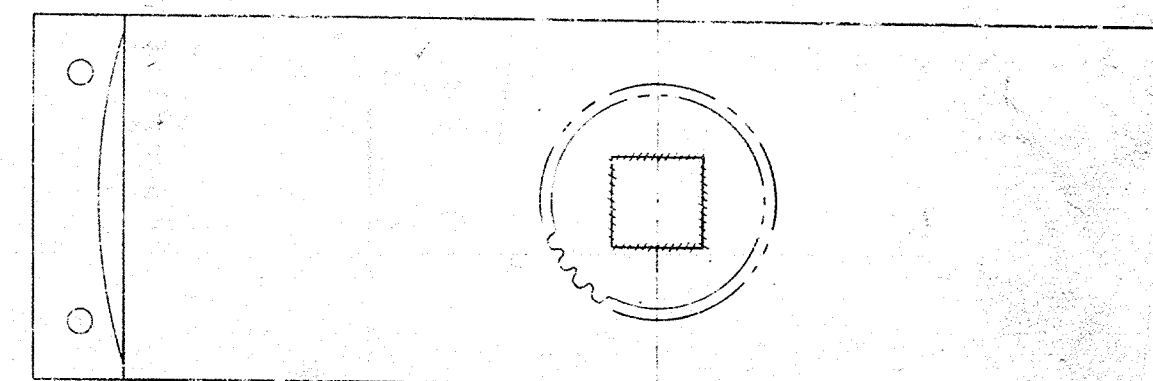

T101508 HOLDING FIXTURE SET

INPUT PORTION OF TRANSMISSION SHOWN ROTATED FOR CLARITY

F1

FILE COPY